

AL-3000




Specifications

| | Number of cavity | | 3 |
|----------------|-------------------------------|-------|-------------|
| | Theoretical capacity | BPH | 2400* |
| Container | Max. container volume | liter | 2 |
| | Max. outside neck | mm | 38 |
| | Max. container diameter | mm | 105 |
| | Max. container height | mm | 330 |
| Power | Rated power | KW | 63 |
| | Max. heating power | KW | 60 |
| Compressed air | Operating pressure | MPa | 0.7 |
| | Operating air consumption | L/min | 1600 |
| | Blowing pressure | MPa | 3.5 |
| | Blowing air consumption | L/min | 5000** |
| Chilled water | Pressure | MPa | 0.3 |
| | Temperature | °C | 10-12 |
| | Flow | L/min | 40 |
| Machine | Main body measurement (LxWxH) | m | 3.6x2.2x2.2 |
| | Weight | Kg | 4000 |

* *Depends on the container design. ** Depends on the container design and operating condition

* This machine has 3 heating zones, 10 layers heating lamps.
* Specifications are subject to change without advance notice.

Provide affordable, reliable machines and molds for PET bottle production Line

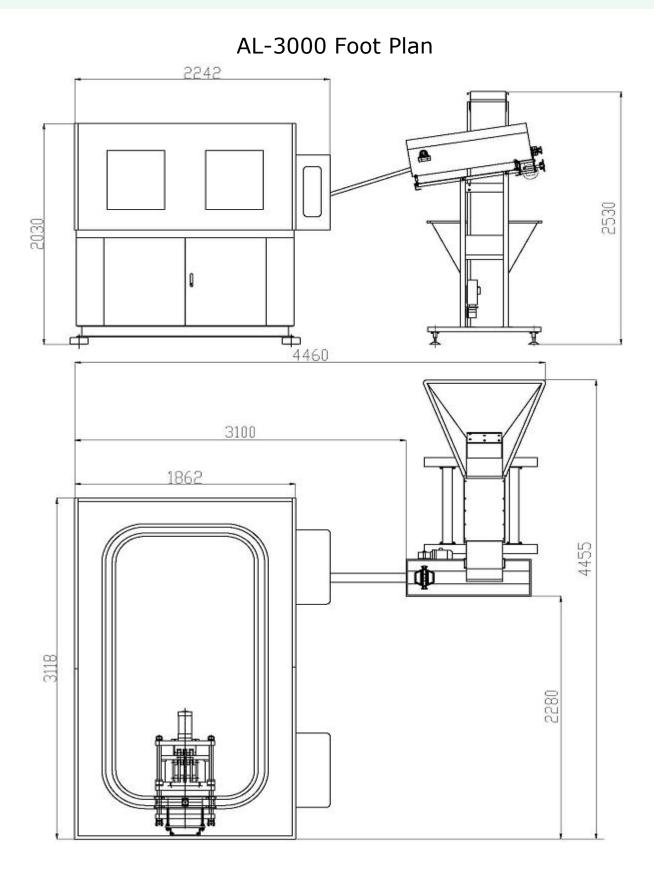

AL-3000 FOOT PLAN

Provide affordable, reliable machines and molds for PET bottle production Line